

MAGNETIC SHEETS 18mm FERRO STEEL PAPER


EZ FILM STEEL/MACO PET STEEL FILM

CGNM018SOL (FF-ST340)

FEATURES AND ADVANTAGES:

- White matte PET steel film, compatible for (eco) solvent, Latex and UV curable printing.
- Working as magnetism principle on magnets, easy to apply, remove and change, without residue
- Without demagnetized, anti-rust
- Premium PET base, good weather resistance, excellent for durable indoor display, big size is available


CONSTRUCTION DRAWING:

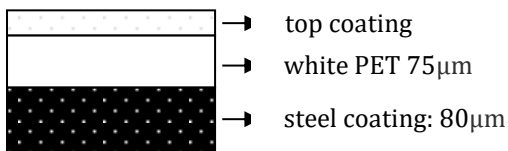

STANDARD SIZE:

30M×914mm	50M×914mm	80M×914mm
30M×1070mm	50M×1070mm	80M×1070mm
30M×1270mm	50M×1270mm	80M×1270mm
30M×1370mm	50M×1370mm	80M×1370mm
30M×1524mm	50M×1524mm	
30M×1626mm	50M×1626mm	

PACKAGING:



PRINTING INDEX:

- compatible
- △ testing required
- × not compatible

(ECO) SOLVENT	UV CURABLE Soft UV ink	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
○	○	○	×	○	○	△

MAGNETIC DATA:

Lifting Weight: ≥ 3.5 (g/cm²)

* Condition: the standard test tool is isotropic rubber magnet 0.7mm (holding strength is about 40g/cm²), test equipment is Tensile Strength Tester.

PHYSICAL DATA:

Total thickness	180µm (±20)
Weight	340g/M ² (±20)
Whiteness	[80, 90]
Gloss 60°	[3, 8]
Opacity	100%
Water resistance	Medium-high

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 30°C daily, relative humidity change is within 30%.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed, and used up within one month.

NOTICE:

- Excess UV ink piling should be avoided. Soft UV ink is recommended.